



Customer Safety Handbook



Dear Valued CPKC Customer,

Providing service and operating safely are two of CPKC's key foundations that define our culture and values and lead to growth and success.

At CPKC, operating safely is more than a requirement for doing business, it is fundamental to who we are as a company and why CPKC has long been an industry leader in rail safety.

We are committed to protecting our people, our communities, our environment, and our customer's goods by being the safest, best performing, and most customer-focused rail transportation provider in North America.



To help you promote safe and efficient movements of your goods, we have created this Customer Safety Handbook to provide direction on safe rail operations. Please feel free to use this as a means to help educate and remind your employees about the potential hazards of rail operations. Following the guidelines outlined in this handbook can help facilitate a safe working environment.

CPKC Home Safe is an initiative designed to improve our safety culture by tapping into the human side of safety and promoting both engagement and feedback with our employees and yours. It culminates in our collective commitment to reinforce our CPKC actions:

- Give a heads up.
- Offer and ask for help.
- Warn people you believe are at risk.
- Identify, report and remove hazards.



Home Safe is a commitment to be vigilant about personal safety and the safety of co-workers.

We encourage you to share our CPKC Home Safe message with your employees. When we work together, we enable safe, efficient, and on-time customer service. Thank you in advance for your commitment to safety so that everyone can go home safely.

Mark Redd

EVP and Chief Operating Officer

Table of Contents

1	Introduction	5
1.1	Purpose	5
1.2	How to Use	5
1.3	CPKC Policies	5
2	Track and Structure Maintenance	7
2.1	Regulation, Inspection and Maintenance	7
2.2	Marking Tracks Out of Service	7
2.3	Track Scales	8
3	Railway Clearances	9
3.1	Clearance Definitions	9
3.2	Customer Spurs and Tracks	9
3.3	CPKC Main Track and Sidings	10
3.4	Infrastructure Changes	11
3.5	Voltage Wire Lines	11
4	Trackside Protection and Signage	12
4.1	Derails	12
4.2	Switches	13
4.3	Flagging and Signage	13
5	Working on or Near Tracks	15
5.1	Working Around Tracks	15
5.2	Crossing Over Tracks	15
5.3	Crossing Over Equipment	16
5.4	Preventing Hazards	17
6	Railcar Handling	18
6.1	Loading/Unloading	18
6.2	Doors: Operation and Spill Prevention	18
6.3	Spillage and Wheel Contamination	20
6.4	Wheel Sets	21
6.5	Lifting	22
6.6	Moving	23
6.7	Hand Brakes	25
7	Transportation of Dangerous Goods	29
7.1	Regulations and Resources	29
7.2	Loading and Unloading Procedures/Regulations	30
7.3	Dangerous Goods Emergencies	31
8	Seasonal Safety Concerns	32
8.1	Seasonal Safety Concerns	32
9	Security on the Railway	34
9.1	Security Concerns, Incidents and Emergencies	34
9.2	Security Recommendations	35
9.3	Shipment Security	36
10	Safety Standards on CPKC Property	37
10.1	Caution: Before Beginning Work on CPKC Property	37
10.2	Required Protection Programs	37
10.3	Personal Protective Equipment	38
10.4	Flagging Protection: Working with a Rail Flag Person	39
11	CPKC Customer Safety Inspection Process	40
12	Railway Safety Resources and Materials	41
13	Emergency Telephone Numbers	43
14	Important Telephone Numbers	44
15	Job Briefings: An Important Note	45



THIS SPACE LEFT INTENTIONALLY BLANK

1 Introduction

1.1 Purpose

The purpose of this handbook is to relay vital safety information to our customers. The information CPKC requires you to follow applies to customer trackage, when the consequences of unsafe acts and conditions can affect both your employees and CPKC employees. This includes important safety requirements for customers operating on or near CPKC railway property. Please ensure all of your employees understand and follow the safety principles in this handbook.

Although most of this handbook covers required practices, recommended best practices for specific railway operations are also included. These can help you improve safety on your property. Recommended procedures and practices are noted as recommendations or requests.

If at any time you have a safety concern with a CPKC operating practice or CPKC equipment, please do not hesitate to contact your local CPKC Operations office.

1.2 How to Use

This handbook can help you inform your employees about the hazards of rail operations. It is written in a concise, instructional format to give you the most important information without any excess material. The handbook can be used to look up specific safety requirements and protocols.

CPKC is available to assist customers with basic rail safety including procedure reviews and developmental education. Contact your local CPKC Operations office for more information.

1.3 CPKC Policies

1.3.1 Safety Policy

CPKC is committed to the health and safety of our employees and the public where they are impacted by our operations.

To fulfill this commitment, all of us must make health and safety an integral part of our lives. We must take personal responsibility for our actions and adhere to the safety policies, rules and regulations at all times.

CPKC is committed to the leadership, organization, training and resources needed to maintain a healthy and safe working environment. All employees must make a personal commitment to safety and perform their work in a manner that will prevent injury to themselves, their fellow workers and the public.

No job on our railway will ever be so important that we can't take the time to do it safely.

1.3.2 Environmental Protection Policy

CPKC is committed to conducting its operations and activities in a manner that:

- protects the environmental health and welfare of its employees and other persons who may be affected by its operations and activities;

- protects the natural environment to meet the needs of today without hindering the ability of society to meet future needs;
- meets or exceeds environmental requirements of government applicable to its operations and activities; and
- keeps employees and the public informed about its environmental plans through communication programs.

1.3.3 Responsible Care®

As a partner in Responsible Care®, a worldwide chemical industry initiative, CPKC plays a leading role in promoting and ensuring chemicals are handled safely at its facilities and throughout its network. CPKC's corporate values, policies and management systems show a commitment to continually improving health, safety, security and environmental performance.

Every year CPKC conducts a number of emergency preparedness workshops, including full-scale mock disasters. Classroom sessions and hands-on exercises help equip firefighters and other first responders with the information and skills they need to respond to hazardous materials incidents on the railway.

Informing our customers and contractors of the hazards of rail operations and safety requirements is key to improving our safety performance. We all have a role to play.

Our Commitment: Environment, Health, Safety and Security

Responsible Care® is the chemical industry's world-class environmental, health, safety and security performance initiative. Developed as a voluntary initiative by member companies of the Chemistry Industry Association of Canada (CIAC) and the American Chemistry Council (ACC), Responsible Care® partners commit to a set of guiding principles to significantly enhance employee safety, community health and environmental sustainability in the locations where we operate.

CPKC is an active transportation service provider to the North American chemical industry and has long been a partner of the Responsible Care® program, formally joining in 1998. As of 2007, CPKC has also implemented the Responsible Care® Management System (RCMS).

RCMS is an integrated, structured management system designed to improve company performance in the following key areas: community awareness and emergency response, security, distribution, employee health and safety, pollution prevention and process and product safety. CPKC's RCMS system includes regular third-party verification of a member's management system and programs against the RCMS standard.

By implementing Responsible Care® across our company, CPKC is ensuring that our role in supporting the North American chemical industry is safe, secure and sustainable.



2 Track and Structure Maintenance

2.1 Regulation, Inspection and Maintenance

Regulation and Inspection

The maintenance of tracks and structures is regulated by the government. Customers must inspect and maintain their tracks in accordance with applicable regulations in your jurisdiction in Canada, the U.S., and Mexico (i.e. federal, provincial and/or state) for “Other than Main Tracks & Sidings.” If your track is not maintained up to regulatory standards, we will not be able to safely switch on your property, which may result in suspension of service and/or additional tariffs. If you are not currently under contract with CPKC for track maintenance services, please regularly inspect your trackage as per your local regulations by a qualified track inspector to ensure the overall safety of your facility and timely service.

Key customer requirements are as follows:

- Inspect each track, switch and crossing monthly with at least 20 calendar days between inspections.
 - If the track is used less than once per month, inspect before each use.
- If the inspector finds any deviation from the regulatory requirements, they must take immediate remedial action or take action to remove the track from service.
- Keep a record of all inspections performed including the date, location, nature of any defects found and any remedial action taken.
 - Keep these records for at least two years and make them available on request to CPKC or any regulatory inspector.

Each of your track inspectors must be qualified to inspect railway tracks in accordance with applicable regulations (in Canada, the U.S. and Mexico). Inspectors must be in possession of a certificate that indicates they have been trained and are qualified to conduct that work.

Note: If maintenance work is done, the contractor who performed the work may also be qualified to inspect it. If not, ensure a qualified inspector examines the track before allowing train operations.

If CPKC Engineering inspects your tracks and structures, they will alert you of necessary improvements. **Call the appropriate CPKC 24/7 emergency line (see page 42) immediately of any changes, damage or problems that may affect CPKC train or switching movements.**

Track Maintenance

The risk of derailment increases if mud, snow, ice and debris collect on and around tracks, more so within flange ways at crossings. Installation of rubber seals (available from railway equipment suppliers) between the rail and crossing materials will minimize the amount of debris accumulating within these flange ways. Ensure crossings are constructed in a manner that has a defined flange way on the gauge side of the rail. Note that gravel dumped into the track to form a crossing does not provide the required stability and this practice has resulted in many derailments in winter. In general, the customer is responsible for snow removal up to the main track switch.

2.2 Marking Tracks Out of Service

To mark a track out of service, put a lock on your switch and immediately notify your local CPKC Operations office. The local CPKC Operations office will alert the Track Manager (TM) or Foreman who will remove the track from service by use of a bulletin advising train crews not to use the track. The TM will also tag and lock the switch out of service. After the track is repaired,

CPKC Engineering, your inspector or a private contractor must inspect it before removing the lock. Contact your local CPKC Operations office to advise of the inspection so that the bulletin can be cancelled.

2.3 Track Scales


If you use track scales for weighing freight cars, inspect and test the scales in accordance with applicable regulations and requirements in your specific jurisdiction. Include the scale tracks and infrastructure in the inspection. If you use track scales for commercial reasons, test and calibrate in accordance with Weights & Measures Canada or regulated standards by the appropriate jurisdictions in both the United States and Mexico. Ensure you have your inspection and calibration records available upon request by CPKC.

3 Railway Clearances

3.1 Clearance Definitions

Clearance requirements protect the safety of people and equipment from moving railcars. Clearances are the vertical and horizontal distances from the track to the nearest obstruction:

- **Vertical clearances** are measured up from the top of the rail.
- **Lateral clearances** are measured from the middle of the track outwards.
- **Restricted/close clearances** are distances less than the given limits.

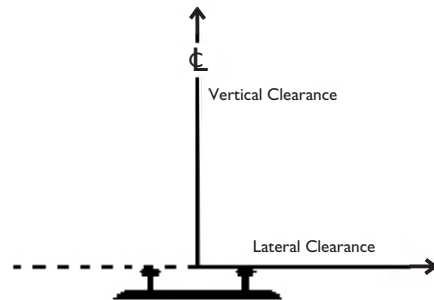

Vertical and Lateral Clearances

3.2 Customer Spurs and Tracks

To reduce the risk of serious injuries or fatalities while switching, ensure there are no obstructions within the **8' (2.4 m) (in Canada)/8' (2.4 m) - 8'6" (2.6 m) (in the U.S. this is state dependent **see note bottom of page) lateral clearance** and the **22' (6.7 m) (in Canada)/21' (6.4 m) - 23' (7.0 m) (in the U.S. this is state dependent **see note bottom page) vertical clearance** (e.g. no restricted clearances). **In Mexico, ensure there are no obstructions within both the lateral and vertical clearance envelopes as per regulatory requirements and standards.** If there is an unavoidable obstruction:

1. **Call the appropriate CPKC 24/7 emergency line (see page 42) immediately of any resulting restricted/close clearance, and**
2. Display restricted clearance signs at the site.

Possible obstructions include:

- Temporary piles of stock, dirt, snow/ice, etc.
- Refuse containers
- Holes, trenches or other ground obstructions
- Parked vehicles,
- Equipment or parts of equipment,
- Fencing
- Buildings
- Fall protection systems

Ensure any gates leading into your property can be opened and properly secured in all weather conditions. This will prevent unsecured gates from swinging closed during switching operations, and contacting CPKC employees. Keep in mind that gate posts designed to be pushed into the ground do not work as well when the ground is frozen.

Note: Regulation Resources

- Canada: Rules Respecting Railway Clearances for Canada. Refer to Transport Canada or the Railway Association of Canada (RAC) for more information.
- ** United States: Clearance requirements are defined by state. Refer to the AREMA manual for more information.
- For Mexico as defined by local regulatory requirements and standards.




Restricted clearance in a customer siding
Inset: Restricted clearance sign



Warning Close Clearance

3.3 CPKC Main Track and Sidings

As a general rule, 25 feet (7.6 m) on either side of the CPKC main track is CPKC property, called the “right-of-way”. Avoid this area at all times. CPKC permission is required prior to accessing CPKC property and violators may be charged with trespassing. The diagram and explanations below show the levels of permission required for certain proximities to the track.

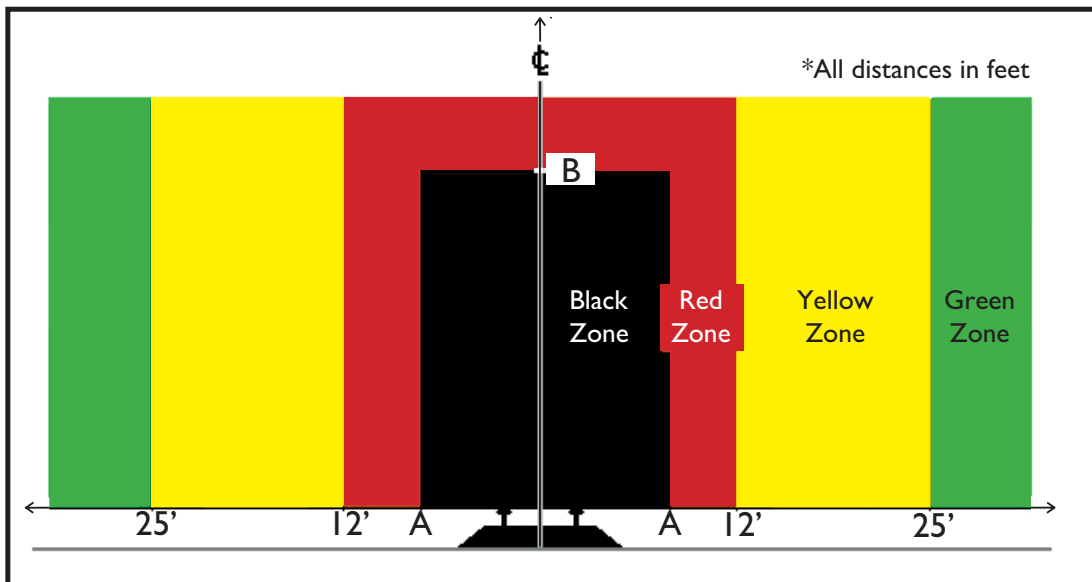

Clearance zones for CPKC track

- A- 8' (2.4 m) (in Canada)/8' (2.4 m) - 8'6" (2.6 m) (in the U.S.)*
- B- 22' (6.7 m) (in Canada)/21' (6.4 m) - 23' (7.0 m) (in the U.S.)*

* In the U.S., both the both the lateral and vertical clearance requirements are state dependent, refer to the AREMA manual for more information.

For Mexico as defined by local regulatory requirements and standards.

Black Zone

No machinery, persons, equipment or parts of equipment are permitted within the **8' (2.4 m) (in Canada)/8' (2.4 m) - 8'6" (2.6 m) (in the U.S. this is state dependent) lateral clearance and the 22' (6.7 m) (in Canada)/21' (6.4 m) - 23' (7.0 m) (in the U.S. this is state dependent) vertical clearance envelope. For Mexico as defined by local regulatory requirements and standards.** Any violation creates a restricted clearance that is hazardous to CPKC and customer employees. Call the appropriate CPKC 24/7 emergency line (see page 42) immediately:

- For any situation that causes an obstruction in this zone
- Any restricted/close clearance resulting from a movement or change of track-side loading platforms or ramps, unloading augers and other equipment.

Red Zone

With **written permission and protection** from CPKC, machinery and equipment can be operated between **8' (2.4 m) (in Canada)/8' (2.4 m) - 8'6" (2.6 m) (in the U.S. this is state dependent) and 12 feet (3.7 m) (for Mexico as defined by local regulatory requirements and standards)** from the center of the rail, on either side of CPKC track. This zone has **no vertical limit** – any work over the track must be approved. One week advance notice is required. Contact your local CPKC Operations office for permission and to arrange protection. (Also see *Section 11.4, Flagging Protection: Working with a Rail Flag Person.*)

Yellow Zone

If need be, temporary structures, materials and equipment can be between **12 feet (3.7 m) and 25 feet (7.6 m)** from either side of CPKC track. To be in the "Yellow Zone" requires **CPKC permission** and possibly flagging protection, if deemed necessary. This zone also has **no vertical limit** – any work over the track must be approved. Again, contact your local CPKC Operations office one week in advance.

Green Zone

Keep buildings, equipment, machinery and personnel more than **25 feet (7.6 m)** away from either rail at all times. This is outside of the right of way and in the "Green Zone."

3.4 Infrastructure Changes

Before altering infrastructure within any of the clearance zones on CPKC or customer property, contact your local CPKC Operations office at least one week in advance. You will be referred to an Engineering representative to discuss your building plan. If necessary, CPKC will provide flagging protection to ensure the safety of the railway and the customer.

3.5 Voltage Wire Lines

The required clearance limits for power lines are:

Canada:

- 24 feet (7.40 meters) above the top of the rail
- 25 feet (7.70 meters) during installation for ballast lifts

United States (lines carrying less than 750 volts):

- 27 feet (8.20 meters) above the top of the rail
- 28 feet (8.50 meters) during installation for ballast lifts

Mexico:

- required clearance limits for power lines over rail tracks must meet local regulatory requirements and standards.

Note: Power lines carrying more than 750 volts need more clearance.

4 Trackside Protection and Signage

Protect your track using properly lined and locked switches and derails before operating any rail equipment. This ensures that the movement does not enter CPKC track. Personnel operating any type of railway equipment must comply with all applicable federal rules and regulations. This includes, but is not limited to, the Canadian Railway Operating Rules (CROR) and the U.S./Mexico General Code of Operating Rules (GCOR).

4.1 Derails

4.1.1 Function

Although extremely damaging to the wheels and track, derails protect people and operations from free rolling and uncontrolled railcars and equipment. They do this by guiding the flange of the wheel over the rail, so that the wheels drop onto the ties and ballast. Be familiar with these locations on the tracks you use.



Hinged Derail

It is recommended that all derails be marked with derail signage. Derail signage indicates the location of a derail. A Derail sign with a number attached to it indicates other derails on adjacent track(s) where signs cannot be installed because of clearance restrictions.

The following page contains schematics of standard derail and a derail switch signs that CPKC typically uses on its property. Your local Roadmaster can provide guidance as to where derail signs can be purchased if you should need them.

Protect your track using properly lined and locked switches and derails before operating any rail equipment. This ensures that the movement does not enter CPKC track. Personnel operating any type of railway equipment must comply with all applicable federal rules and regulations. This includes, but is not limited to, the Canadian Railway Operating Rules (CROR) and the U.S./Mexico General Code of Operating Rules (GCOR).

4.1.2 Use on CPKC Tracks

Applying and removing CPKC derails is the responsibility of CPKC personnel. Only in specific cases, and when documented clearly with written procedures, can non-CPKC personnel operate CPKC derails. If you observe a derail in the unlocked or non-derailing position, notify the appropriate CPKC Operations Center (see phone numbers p.42) immediately.

4.1.3 Use on Customer Tracks

Keep all equipment within 100 feet (30.5 m) but no closer than 5 feet (1.5 m) from a derail locked in the derailing position. We recommend locking unattended derails in the derailing position, whether there are cars on the track or not. On a facing point move, avoid riding a car over a derail left in the non-derailing position.

Like switches, customers and their employees must know the location of derails on their property and assist in their upkeep. This includes ensuring the following:

- Ground surface is always level and clear of snow and debris around the derail.
- Ensure there is no ice buildup or rust present.
- Ensure the derail is secured to the track.
- Ensure derails remain locked in the derailing position when being used for protection.
- Ensure the derail is properly lubricated and moves freely when open or closed.
- Keep derail signs clean and visible.



Blue flag in use

Photo: Kirsten Smyth

4.2 Switches

4.2.1 Use on CPKC Tracks

CPKC switches are the responsibility of CPKC personnel. Like derails, only in specific cases can non-CPKC personnel operate CPKC switches.

Stay away from track switches. Remotely operated switch points can move unexpectedly with enough force to crush ballast rock.

4.2.2 Use on Customer Tracks

Customers and their employees must know the location of switches on their property and assist in their upkeep. This includes ensuring the following:

- Keep the ground surface level around the switch to avoid walking hazards.
- Clear the area from snow, debris and anything else that may disturb movement.
- Make sure there is no ice buildup or rust on the block.
 - This may require sanding.
- Ensure switches are adjusted and lubricated.
- Ensure the bolts are secured to the base.
- Ensure switches remain locked or the keeper inserted when not in use.
- Keep switches clean and painted and the targets clear and visible.

4.3 Flagging and Signage

4.3.1 Use on CPKC Tracks

Do not obstruct, remove, relocate or alter any signs, signals or flags necessary for the safe operation of the railway without proper authorization.

Railcar loading and unloading operations require protection to ensure that equipment is not moved while employees are working on or near it. There are various ways in which this can be achieved such as the use of derails, locked switches and blue flags. Blue flags are used by railcar maintenance personnel to indicate that they are working on, under or near rail equipment. At the same time, the track is locked at both ends to prevent equipment from gaining access to that track. Red flags, or red lights by night, are used when employees are working on the track and moving equipment is prohibited from passing over that track. Never block red flags.

4.3.2 Use on Customer Tracks

CPKC wants to prevent inconsistencies that may develop in blue flag use, which would jeopardize the positive nature of this protection. If you chose to use blue flag protection on your property, the following is requested:

- Keep blue flags clean on both sides, free of dirt, oil and grease, etc. which would otherwise make it difficult for others to clearly see the flag.
- Keep the paint on both sides of the flag in good condition so that it can be clearly seen and is not weathered or obstructed by rust.
- Secure and lock the blue flag using mechanical means such that it will not fall down due to wind, or be inadvertently removed.
- Do not display blue flags between adjacent railcars. This can block the blue flags from view by our employees.
- Display blue flags at one or both ends of all equipment on the same track, depending on the layout and access to the tracks.
- Develop safety procedures to ensure flag protection and its removal, are understood and complied with by all employees.

Blue lights are used for work done during the evenings and bad weather conditions to ensure the signal is visible. If using blue lights, we request that you follow the same procedures as given for blue flags.

Note: If a blue flag is left up or a blue light left on, CPKC will not perform switching operations at that location or track. This may result in the assessment of CPKC tariff charges (unable to place cars and/or unable to lift cars at your facility).

5 Working on or Near Tracks

There are several important safety concerns that you should be aware of prior to working on or near rail equipment and track. CPKC believes in sharing best safety practices. The practices outlined below are required at all times by all personnel on CPKC property. We recommend that you follow them on your trackage as well.

5.1 Working Around Tracks

Be alert:

- Watch for the possible movement of trains, engines, cars and other on-track equipment. They can move at any time, on any track, and in either direction.
- Be especially careful in yards and terminal areas. Cars are pushed and moved, and can change tracks often. Cars that appear to be stationary or in storage can begin to move.
- Look before you step. Trains can approach with little or no warning. You may not be able to hear them due to atmospheric conditions, terrain, noisy work equipment, or passing trains on other tracks.
- Be aware of the location of structures or obstructions where clearances are close.
- Never rely on others to protect you from train or car movement. Watch for yourself!

Watch for tripping and slipping hazards:

- Be aware that rails and ties can be slippery and railway ballast can shift while walking on top of it.
- Do not step on any part of a rail, a switch including switch rods, a derail, a frog, etc.
- Remain alert and mindful of your surroundings at all times
- Use designated walkways, crosswalks, handholds and railings when available, and appropriate safety devices if required to cross over equipment.
- Plan and choose routes with the safest walking conditions and keep a clear view when walking.

Stay clear of tracks whenever possible:

- Never stand, walk or sit on railway tracks, between the rails or on the ends of ties unless absolutely necessary.
- Never stand or sit on rails.
- Do not occupy the area between adjacent tracks in multiple track territory when a train is passing.
- Never stand on or foul of the track when there is an approaching engine, car or other moving equipment.
- Stand 20 feet away from the tracks if possible, when rail equipment is passing through.

Stay away from trackside devices:

- Stay away from track switches. Remotely operated switch points can move unexpectedly with enough force to crush ballast rock.
- Stay away from any other railway devices you are unsure of.

In the United States, On Track Safety rules developed by the Federal Railroad Administration (FRA) apply. The FRA requires specific training and obedience of these rules at all times when working on or near railroad property. Large regulatory fines can result from any violations.

5.2 Crossing Over Tracks

When crossing railway tracks:


- Watch for movement in both directions before crossing.
- Watch for pinch points at switch locations.

- If the tracks are clear, walk single file at a right angle to the rails.
 - Never step on the rail.
 - Never walk between the rails of any track.
- Keep at least 15 feet (4.6 m) away from the end of a car or locomotive to protect yourself from sudden movement.
- If crossing between two railcars, ensure there is at least 50 feet (15.2 m) between them.
- Never move equipment across the tracks unless at an established road crossing or under the supervision of a CPKC Flag Person as otherwise it can damage the track.

5.3 Crossing Over Equipment

In some cases, you may have to cross over rail equipment. Always try to walk around, following the safety guidance given previously in section 5.2. However, if you must cross over a car to apply or release a hand brake, be extremely careful, and abide by the following:


- Never cross under equipment.
- Never try to cross over moving equipment.
- Always use safety devices such as ladders, handholds and crossover platforms.
- Never put your feet on moveable machinery such as couplers, sliding sills or uncoupling levers.

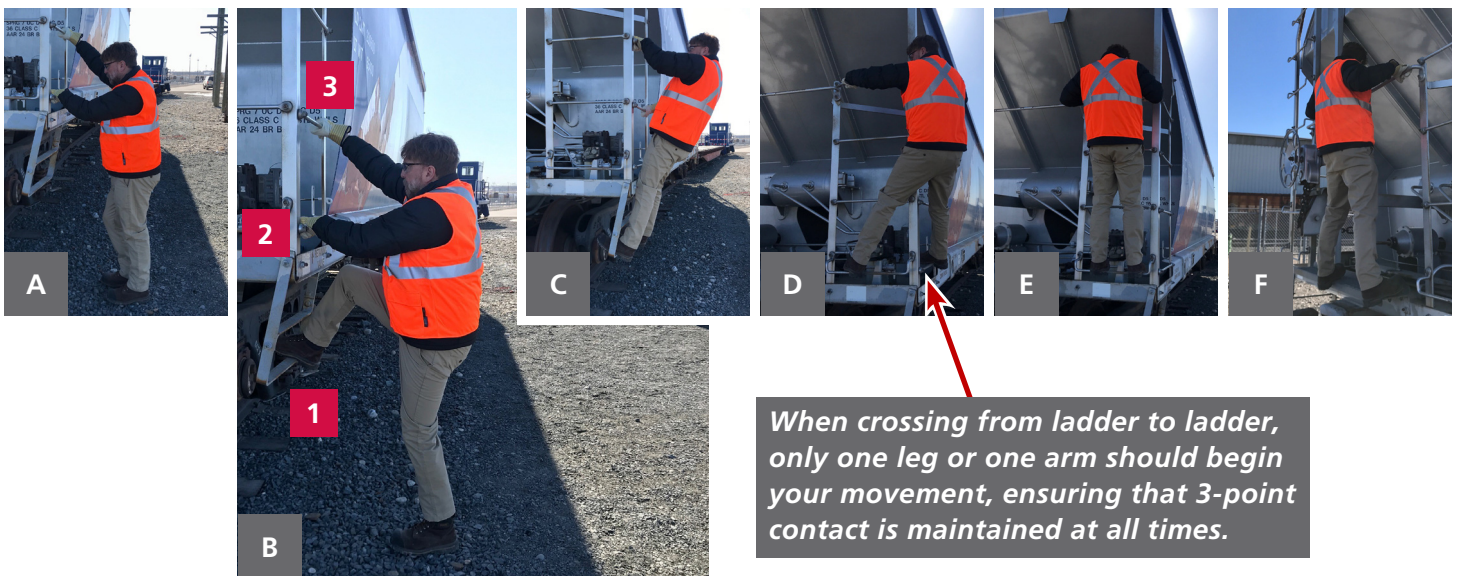

When crossing from ladder to ladder, only one leg or one arm should begin your movement, ensuring that 3-point contact is maintained at all times.

For your safety, maintain 3-point contact at all times.

Crossing over equipment

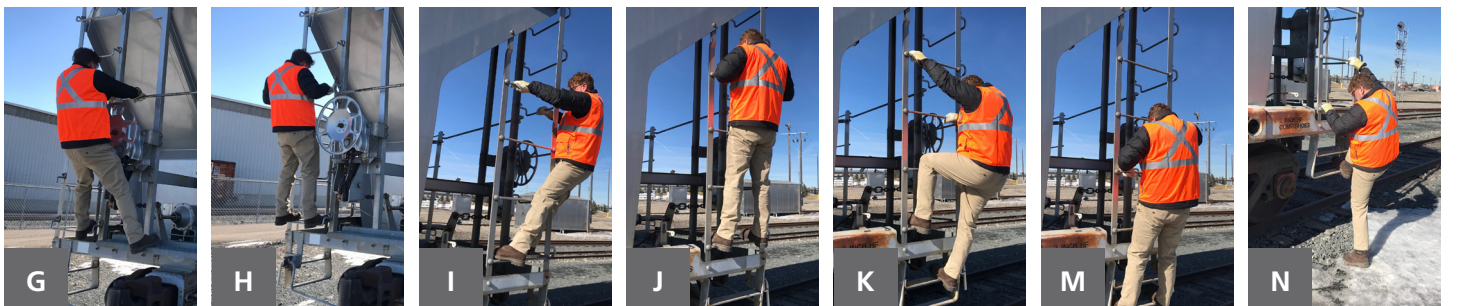

For your safety, maintain 3-point contact at all times.

- Never step onto any part of the coupler or assembly, angle cock, air hose, wheel or truck assembly, train line or operating (uncoupling) lever.
- Always keep “3-point contact” (e.g. two feet and one hand) with equipment and safety devices.
- Do not stand, sit or walk on any part of open top rail cars (i.e. gondolas, hoppers, ballast cars, or air dump cars).

5.4 Preventing Hazards

5.4.1 Tripping and Slipping

Obstructions can cause tripping hazards and car derailments:

- Keep tracks free of the accumulation of snow, ice, vegetation and debris. It is especially important to keep flangeways at road crossings free of ice and debris.
- Remove any discarded banding used to support shipped products and other debris from the tracks.
- Deliver maintenance materials to the work site as close to the actual work being done as possible to reduce the risk of materials becoming track obstructions.

When unloading pits are used, both rail and customer employees can fall in and seriously injure themselves.

- Ensure all unloading pits are covered.
- Ensure that the location of pits or other in ground hazards are properly marked.

5.4.2 Water

Standing and flowing water are serious hazards to track stability. Water can also freeze causing a potential slipping hazard. Drainage systems direct water away from the track. If on CPKC tracks, report the following to the CPKC Operations Center (OC) immediately:

- Blocked culverts
- Water undercutting the track
- Standing pools of water adjacent to any track

If these occur on your trackage, please contact your maintenance personnel immediately.

5.4.3 Line of Sight

Transport Canada regulates the minimum railway crossing sightlines for all grade crossings without automatic warning devices (including public farm and private crossings).

Visit: <https://www.tc.gc.ca/en/services/rail/grade-crossings.html>

Keep sightlines clear at all railway crossings and where there is frequent employee or pedestrian traffic. Snow piles and vegetation, materials, equipment and other obstructions must be removed if they affect the ability to see train traffic at public or private crossings.

Contact the appropriate CPKC Operations Center (see phone numbers p.42) immediately, if the minimum line of sight is compromised.

6 Railcar Handling

6.1 Loading/Unloading

6.1.1 Regulations and Requirements

The Railway Association of Canada (RAC) and the Association of American Railroads (AAR) establish General Rules governing loading requirements for railcars. Failure to load in accordance with these rules is a defect under Transport Canada. Specific instructions and requirements are contained in RAC and AAR Circulars, Best Practices and General Information Series.

Follow the loading rules for the type of lading and railcar being used. This applies to all railcars including intermodal containers and trailers, boxcars and covered hoppers.

For more information, current loading guidelines can be found here:

<https://www.cpkcr.com/en/customer-resources/shipping-guides-resources/Loading-Guides-and-Sealing-Requirements>

Before loading, ensure that the railcar is in good mechanical condition and that it fits the following:

- Weather tight/leak proof
- Interior floor in good condition (no holes)
- Interior walls in good condition
- Doors and locking mechanisms in good condition, closed properly and sealed
- Safety appliances such as ladders, steps, railings are not broken
- No signs of any other conditions that do not appear normal

If there are signs of any other conditions that do not appear normal, contact your local CPKC Operations office for advice.

6.2 Doors: Operation and Spill Prevention

6.2.1 General Procedures

The Association of American Railroads (AAR) publishes circulars and best practices for the safe opening and use of all railcar doors. Contact your local CPKC Operations office if you operate rail car doors to obtain this information.

Opening Doors

- Use caution when opening doors of any type. Lading can shift during transport and may fall out or push the door out of its tracks.
- Before opening, visually inspect the door and supporting hardware for damage.
- Always use the proper tools to open doors. Improper tools can damage railcars.

Closing Doors

Close and secure all doors before releasing cars. This includes bottom gates and top hatch covers.

Leaving railcar doors open or unsecured:

- Impacts railway safety,
- Allows trespassers to climb into cars,
- Allows loss of commodity, and
- Decreases locomotive fuel efficiency.

Please take the necessary time and precautions to ensure railcar doors are closed before transport. Do not load cars with defective doors or gates.

6.2.2 Plug Doors

All plug doors must be securely closed according to regulatory requirements before CPKC moves the car.

Please keep in mind the following when operating plug doors:

- Inspect plug doors before attempting to open them.
 - Ensure door hinges are secure in the track, top and bottom, before opening.
 - Ensure nothing is bent, damaged or broken.
- Observe that the operating handle is loose in its keeper before removing the keeper from the handle.
 - If the handle is not loose, this may indicate that the lading is applying pressure against the door.
- Use caution when opening plug doors. Loads that have shifted against the door can cause the handle to spin unexpectedly, and the door to jump outwards when released. This can result in employee injury.
- Never use lift equipment to open a railcar door. If the door is difficult to open, use a cable or chain winch for assistance.

6.2.3 Bottom Gates and Hatch Covers – Closed Covered Hopper Cars

Before opening the bottom gates on closed covered hopper cars:

- Be sure to use the correct gate opening device or tool.
- Release all gate locks (including those with self-locking locks). This prevents bending and damage to the gate shaft and opening mechanisms.
- Ensure the gate opening device is well into the capstan. This prevents damage to the capstan such as rounding of the square drive socket.
- Do not over-torque the capstan.



Photo: Mike Merrick

Damaged capstan (rounded square drive socket)

Note: Damaged gates may not operate properly and the work to repair them could lead to possible CPKC employee injury.

When loading covered hoppers:

- Be gentle with hatch covers.
- Inspect all gates to ensure they are properly closed and secured to prevent any spillage.
- Ensure hatch covers are closed prior to shipping.
- We recommend that you use a fall protection system.

For any questions, contact your local CPKC Operations office.



Photo: Mike Merrick

Bent hopper gate being repaired

6.3 Spillage and Wheel Contamination

Report all leaks and spills to the appropriate CPKC 24/7 emergency line (see page 42) if they occur on CPKC property (see *Section 14, Emergency Telephone Numbers* for contact information). If on customer property, contact your maintenance personnel. If the substance spilled is a dangerous good, please refer to *Section 5.3, Dangerous Goods Emergencies* for more information on reporting and emergency procedures.

6.3.1 Wheel Contamination

Wheel contamination from consumer products like flour, canola oil and cornstarch can cause problems with rail equipment. These and other similar substances can affect braking and lead to serious incidents at our rail yard hump operations.

To avoid wheel contamination:

- **Ensure your facility is free of product contamination and spillage.**
- Clean up all spills immediately.
- Report any leaks to the appropriate CPKC 24/7 emergency line (see page 42).

To prevent serious incidents and equipment damage:

- If railway equipment is rolled through a contaminated area, it is mandatory to pressure-clean the wheels with air or water.
- After cleaning, inspect the wheels to ensure no potential lubrication still exists.

6.3.2 Wildlife Protection

Grain and other food products that leak from hopper gates, or are left on hopper car tops and end sills, attract wildlife to the tracks where they are at risk of being contacted by trains.

To correct this problem, CPKC is currently replacing and refurbishing the gates on a large number of grain cars and has introduced a program to clean the end sills. We also need assistance from our customers to help reduce this risk to wildlife:

- Spot and report any defective hopper gates.
- Ensure the loading chute is completely closed when positioning cars underneath.
- Before loading and after unloading hoppers, ensure gates are closed and secured to prevent spillage.
- After loading, inspect top and side sills and clean off any grain or other food product.
- Once cars are pulled, have a process to clean spills on or near tracks.



Photo: Greg Cook

Bear on Hopper Car

6.4 Wheel Sets

6.4.1 General Information

Railcar wheel sets are comprised of two wheels, two bearings and one connecting axle. The condition of the wheel sets is extremely important to safe railway operations. When a freight car is set off for a customer, it often must be moved for loading. When moving and spotting cars, there is a risk of contacting the freight car wheels, journal bearings or axles with equipment such as forklifts, other large machinery or equipment indexers. This can cause serious damage.

6.4.2 Wheel Set Damage

Under the weight of a railcar and at increasing speed, any damage to the wheel or bearing can progress to the point of catastrophic failure, and can result in train derailment. If a car derails, note the speed and distance traveled as this will govern whether the wheel set will be inspected or replaced. In addition, if a bearing is ever submerged in water it must be replaced.

Contact your local CPKC Operations office immediately if:

- A car derails,
- There is any potential damage to bearings (i.e. bearings submerged in water),
- There is any contact to a freight car wheel or bearing by a forklift or any other machine or device.

6.4.3 Balance and Securement

The wheels of a railcar are flanged to guide the railcar through curves and to prevent it from sliding off of the rail. An improperly balanced load causes the wheel on the lighter side to climb the rail, particularly during curving.

It is vital that all loads are properly balanced and secured. Before releasing a car after loading or unloading:

1. Ensure the load is properly blocked and secured. Add more blocking and bracing as required.
 - For closed car loading, including intermodal containers/trailers and box cars, use blocking and bracing to prevent movement of the load in transit.

- **Do not use end doors for blocking and bracing as train forces are too strong.**
- 2. Check that all doors, hatches, and outlet gates are fully closed.
- 3. Remove all loose material from any open car deck.
 - Particularly ensure that double stack well cars have no inter box connectors (IBCs) lying on the deck.
- 4. Remove or secure any banding, chains, or cables.

Note: Supplementary tariffs developed by CPKC may result in charges and penalties for improper load securement and resulting damage to equipment. For questions contact your local CPKC Operations office.

Please refer to <https://www.cpkcr.com/en/customer-resources/pricing-and-tariffs> for current information on tariffs.

6.4.4 Dimensional Loads/Overloads

A dimensional load is a shipment that is greater than the maximum standard for size, weight, and/or height of center of gravity. The track structure is carefully designed to handle the standard forces of railcar weight and movement. Dimensional loads place excessive stress on the equipment and track and can cause damage and derailment. To prevent damage:

- Observe the load limit stenciled on the car or identified in the Universal Machine Language Equipment Register (UMLER).
- Ensure that your load is within the maximum standard for weight and height of center of gravity.

Your Customer Service Representative can help with information on maximum size, weight and/or height of center of gravity capacities for your intended route.

Note: If you must come onto CPKC property to fix an overload, contact your Customer Service Coordinator in advance to ensure compliance with the Overload Management Process.

6.4.5 Damage Prevention

Safe stowage and cargo securement is mandatory by railway regulation. Shippers are responsible to adequately load and secure a shipment for safe rail transportation, in accordance with CPKC, AAR and RAC standards. More information including handouts and loading plans can be found at the back of this handbook, *Additional Information From Damage Prevention and Claim Services (DPCS)* or by contacting your Customer Service Coordinator.

6.5 Lifting

The frame or body of a standard railcar sits on two center plates, each on top of a truck assembly. The lubricated surface of the center plates allows the truck to rotate beneath the body and allows rail equipment to turn without causing excessive force on the gauge between the rails. Neither the car body nor the wheels are fastened to the truck assemblies.

The components sit in place primarily by weight.

Never lift railcars. If an emergency condition requires the railcar to be lifted, contact your local CPKC Operations office immediately to have the car inspected and ensure it is sitting correctly on the center plate and bearings.

6.6 Moving

6.6.1 Procedures

The movement of railcars by mechanical methods (i.e. loaders, cables, winches, pulleys) requires the development of safe work procedures specific to each operation. We encourage customers to develop, document and train their employees in safe car movement. Here are a few key requirements to keep in mind when developing procedures for railcar movement. Procedures must:

- Clearly outline the method of controlling and signaling that will be used during car movement activities. This includes keeping someone in a position to observe the leading end of the movement and relay signals to the equipment operator.
- Ensure that no car can be moved while people are working in or around that equipment.
- Include the requirement to walk around and inspect for the removal of all dock plates, loading/unloading equipment, connecting hoses or cables and loose debris of any kind.
- Ensure established methods of communication are followed.
- Ensure that the equipment can be safely controlled by the method employed.

6.6.2 Hand Operated Car Mover and Rail Car Mover (Trackmobile)

- Clearly outline the method of controlling and signaling that will be used during car movement activities. The following steps are recommended when moving freight cars with hand operated car movers and trackmobiles:

Hand Operated Car Mover

Hand operated car movers should not be used to move cars on an incline. The following steps are recommended when using a hand operated car mover:

1. Be aware and fully understand how it operates.
2. Ensure the track is clear of obstructions for the entire distance the car will be moved.
3. Advise everyone in the area of the intended move and ensure they understand.
4. Discuss the intended move with all personnel involved.
5. Fully release the car's hand brake, unless required to control movement. In this case, ensure the wheels do not skid.
6. Keep someone at the hand brake to apply it when required.
7. After the car is moved, fully apply the handbrake and if possible, test its effectiveness.

Rail Car Mover (Trackmobile)

A rail car mover should only be operated by qualified individuals. The following steps are recommended when operating a rail car mover:

1. Ensure the track is clear of obstructions for the entire distance the car will be moved.
2. Advise everyone in the area of the intended move and ensure they understand.
3. Discuss the intended move with all personnel involved.
4. Ensure the rail car mover is set for track operations.
 - Ensure the rail wheels are correctly aligned with the track.
 - Retract the road wheels completely using the Road Wheel hydraulic control.
5. Ensure the rail car mover brakes work as intended.
6. Couple or connect the rail car mover to the car to be moved.
 - When raising the coupling device, be sure not to lift the rail car off of its truck assembly.
7. Fully release the hand brake.
8. Keep someone at the hand brake to apply it when required.
9. After the car is moved, fully apply the hand brake and if possible, test its effectiveness.

If you require assistance or would like a CPKC representative to review your procedures used to move railcars, please call your local CPKC Operations office.

6.6.3 Coupling Cars

When coupling cars:

- Ensure that the car being coupled to is properly secured before coupling so that if the coupling does not make, the car will not roll away.
- Ensure all couplers are aligned and that at least one knuckle is open before coupling to any car.
- Do not adjust drawbars or knuckles, hoses or angle cocks when cars are about to couple.
- Confirm that any string of cars is fully coupled together before moving or leaving, if possible. A slight push or pull should be sufficient.
- Ensure one angle cock is left open after moving cars with coupled air lines.

6.6.4 Leaving Cars

When leaving cars:

- Do not leave railcars foul of any CPKC tracks as trains and track units may hit foul equipment or personnel.
 - Foul of track means being within four feet (1.2 m) of the nearest rail. This is close enough for the individual or equipment to be struck by a moving train or track unit.

Within your facility on your industry tracks if you must leave railcars foul of an adjacent track you must leave the cars on the switch points and the switch must be lined towards those cars to make it obvious to others that the railcars are in fact foul.

- If unable to determine whether the cars are clear of the adjacent track; determine the clearance point by standing outside the rail of adjacent track and extend arm towards the equipment. When unable to touch the equipment leave equipment at least an additional 50 feet (15.2 m) into the track to ensure the equipment is beyond the clearance point.

Leave parked railcars within 100 feet (30.5 m) but no closer than 5 feet (1.5 m) of a derail locked in in the derailing position.

Apply the required number of handbrakes and test effectiveness if possible (refer to Section 6.7.1).

6.7 Hand Brakes

Railcars have two braking systems:

- **Air brakes** use air pressure when cars are connected to a locomotive. They are used for train control and are not intended to secure standing cars. When leaving a standing portion of cars the angle cock must be left fully open and may be closed only after the angle cock on the opposite end of the cars is fully open.
- **Hand brakes** are used to secure standing railcars when they are not coupled to a locomotive. They prevent unintentional movement. Hand brakes take up slack on a chain which is linked by a series of rods, levers and gears to brake shoes. The brake shoes apply force against the wheels.

6.7.1 Minimum Number of Hand Brakes

The table below lists the minimum number of hand brakes required to secure a car or block of cars. **It is highly recommended that cars are always secured with at least the minimum number of hand brakes applied to each block.** In some cases (e.g. when loading heavy material or securing cars on a slope) extra hand brakes may be required. Increase these numbers if you are having difficulty controlling movement, experience unintended movement or are unable to test effectiveness. If you require assistance or would like a CPKC representative to review your use of handbrakes please call your local CPKC Operations office.

Note: In cold weather, braking effectiveness is decreased.

Number of Hand Brakes to Apply	
Number of cars coupled together	MINIMUM number of hand brakes
1 - 2	1
3 - 9	2
10 - 19	3
20 - 29	4
30 - 39	5
40 - 49	6
50 - 59	7
60 - 69	8
70 - 79	9
80 - 89	10
90 - 99	11
100 - 109	12
110 - 119	13
120 or more	Divide by 10 and add 2

When securing cars on a slope:

- Apply **more than the minimum** number of hand brakes.
- Apply hand brakes to the cars at the lower end of the downward sloping track.

If a railcar has a defective hand brake:

1. Report it to your local CPKC Operations office.
2. Couple the car to another car with an effective hand brake.

6.7.2 Safe Operation of a Hand Brake

There are many different types of hand brakes, with different methods of operation. The following safe practices are recommended for *all* hand brakes.

Ensure the equipment is in good working order:

- Observe the condition of ladders, steps, grab irons and brake steps before climbing onto a car.
- Never use a hand brake wheel as a handhold.
- Before operating any hand brake, observe its type and the condition of all parts, including the hand wheel or lever and chain. Ensure the chain is not caught on the platform.
- Do not attempt to use a hand brake or other equipment that is difficult to operate, defective or damaged.
 - Report the defective hand brake or equipment to your local CPKC Operations office so that it can be repaired or replaced. The life of the next person on this car may depend on that hand brake.

Always use the correct hand position:

- Never use both hands or a foot to operate a hand brake.
- Keep your body and hands free of all moving parts (e.g. chain, wheel, release handle). Never reach through the spokes of a brake wheel, because the wheel may spin.
- Use one hand to operate the hand brake and the other hand to firmly grip the equipment.
- When applying a hand brake, always grip the wheel with the thumb on the outside. Grasp the rim of the wheel for maximum leverage.
- When releasing wheel-type hand brakes, keep hands and fingers clear of the wheel.

Always keep the correct body position:

- Be alert while climbing on a car, while operating the hand brake and while climbing down from the car.
- Be aware of other equipment in the area.
- Avoid applying hand brakes on the leading platform of a moving car.
- Maintain 3-point contact (as shown in the photo below) when applying or releasing a hand brake. This reduces your risk of falling if cars unexpectedly move or a hand brake malfunctions.
 - Exception: Standing equipment with a low mounted handbrake on the side of the railcar (not on the end of the railcar) may be operated from the ground.
- Never operate a hand brake while standing on a draw bar head, other coupling mechanism or rail.
- Be on guard against sudden car impacts. Anticipate starts and stops.
- Observe lading for tonnage and type of load. Be cautious of a surge or shift of load (e.g. tank car will have a surging effect due to lading moving back and forth inside).



3-point contact for applying a vertical handbrake

To apply a hand brake:

1. Reach behind the brake wheel with your right hand and place the release lever or pawl (if so equipped) in the "ON" position. Keep hands, fingers and loose clothing away from the wheel spokes.
2. Grip the brake wheel rim with your right hand keeping your thumb on the outside. Turn the brake wheel clockwise to take up the slack in the brake chain.
3. After slack is taken up, place your right hand at the seven o'clock position on the rim of the wheel. Keeping your back straight, push hard downward with your right leg as you lift upward in short pulls on the brake wheel with your right hand. Minimize twisting by keeping hips and shoulders facing in the same direction.
4. Visually observe that the brake shoes are tight against the wheels. Keep in mind that some hand brake riggings are connected to brake shoes on both ends of the car while others are only connected at one end. You may need to check both ends of the car.

Releasing a Hand Brake

Before releasing a hand brake, consider the following:

- Is there anyone working on or around the equipment?
- Is the equipment on a slope? Will it start to roll if the hand brake is released?
- Are there dock plates, loading chutes, hoses or other attachments connected to any of the cars?
- Are there any hoses, cables, extension cords or other obstructions lying across the rails?
- Can the cars be safely moved, stopped and hand brakes re-applied?
- Are the operators familiar with safe practices for car movement?
- Are there any derails in the vicinity?

To release a hand brake:

1. Assume the same three point stance as when applying a hand brake. Again, keep hands, fingers and loose clothing clear of the wheel. (Some types of wheels spin when the release lever or pawl is tripped in the "OFF" position).
2. Reach behind the brake wheel with your right hand and place the release lever or pawl (if so equipped) in the "OFF" position. Never reach through the wheel spokes.
3. If the hand brake is not equipped with a release lever or pawl, grasp the wheel at the one o'clock position and turn the wheel counterclockwise until the brake is completely released.
4. Ensure the hand brake is fully released. Observe that the:
 - Brake chain is loose,
 - Pawl is kicked out (if so equipped), and
 - Bell crank is in down position (if so equipped).
5. After the hand brake is fully released, return the release lever to the "ON" position.

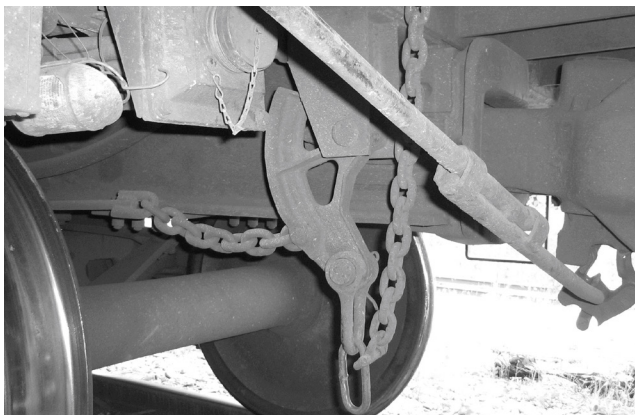


Photo: Tyler Kerr

Bell crank in released position

After Moving Rail Equipment

1. Assume the same stance as for applying the hand brake.
2. Apply the required number of hand brakes and test effectiveness if possible.
3. Visually observe that the brake shoes are tight against the wheels. Remember that some hand brake riggings are connected on both ends of the car while others are connected at one end. You may need to check both ends of the car.
4. Push or pull the car(s) slightly to ensure brakes are providing a sufficient retarding force.
5. Observe the cars to ensure they are completely at rest.

6.7.3 Caution: Partially and Fully Applied Hand Brakes

NEVER move railcars while hand brakes are applied.

A hand brake can apply enough force on the wheels of a railcar to prevent the wheels from turning when the car moves. This causes the wheel to skid along the rail. Skidding a wheel for as little as one second can cause small cracks on the tread. These small cracks lead to spalling (where little pieces of the tread fall out) and to deeper cracks in the structure of the wheel. Structural damage can go undetected until the wheel suddenly breaks apart.

It is very dangerous to leave hand brakes partially applied. Always fully release hand brakes before shipping.

Partially applied hand brakes cause excessive heating that can damage the wheel. Please develop procedures to ensure hand brakes are fully released before shipping railcars.

7.1 Regulations and Resources

When handling cars containing dangerous commodities or hazardous materials, comply with all applicable regulatory requirements. For additional information, please refer to:

- Canada: The Transportation of Dangerous Goods Act and Regulations
<https://tc.canada.ca/en/corporate-services/acts-regulations/list-regulations/transportation-dangerous-goods-regulationshttps://www.ecfr.gov/cgi-bin/text-idx?SID=2e5ecd552e01e789b3dcf29edc7893bb&mc=>
- United States: The Hazardous Materials Regulations of the Department of Transportation (49 CFR)
<https://www.ecfr.gov/current/title-49/subtitle-B/chapter-I/subchapter-C/part-172?toc=1>
- Mexico: Regulations for the Ground Transportation of Hazardous Materials and Waste of the SEGOB Diario Oficial de la Federacion
https://dof.gob.mx/nota_detalle.php?codigo=4728441&fecha=07/04/1993#gsc.tab=0

The 2020 Emergency Response Guidebook is a joint publication by the U.S. Department of Transportation, Transport Canada and the Secretariat of Communications and Transportation of Mexico (SCT). It is designed as guide for first responders (such as firefighters, police and other emergency services personnel) for transportation incidents involving hazardous materials. For a copy of this guide, please see: <https://www.tc.gc.ca/eng/canutec/guide-menu-227.htm>

For a copy of this guide, please see:

- Canada: Railway Association Canada (RAC)
- United States: AAR Bureau of Explosives (BOE)

7.1.1 Canada: Railway Association Canada

The Railway Association of Canada's Dangerous Goods Team (DG Team) is made up of specialists with emergency response, technical and regulatory experience, as well as extensive knowledge of tank car design, construction and damage assessment. In Canada, the DG Team provides training, as well as support and guidance to railway employees and shippers on the proper labelling, safe loading and unloading of railcars and other containers. The team also inspects and audits facilities (chemical, energy and railway) to make sure that railcars and containers carrying dangerous goods comply with regulations.

7.1.2 United States: American Association of Railroads

The American Association of Railroads (AAR) works to improve the efficiency, safety and service of the railroad industry, such as through its responsibility for the industry's interchange rules and equipment specifications. The AAR publishes additional information and resources on the proper securement and preparation for transportation of various types of rail equipment:

<https://www.aar.org/wp-content/uploads/2023/03/Pamphlet-34-3.1.23-Final.pdf>
<https://www.aar.org/wp-content/uploads/2017/12/AAR-CPC-1122-BOE.pdf>
<https://www.aar.org/nar>

7.1.3 Mexico: Agencia Reguladora del Transporte Ferroviario

The Rail Transport Regulatory Agency (ARTF) has the authority to propose the mechanisms for the dissemination of studies and research, through publishing information on safety and other indicators in the rail sector. ARTF publishes regulations related to tariffs and rates, interchanges, technical specifications for railroads, and Public Security.

7.2 Loading and Unloading Procedures/Regulations

The following apply to all workers involved in loading and unloading tank cars carrying dangerous goods/hazardous materials. They must:

- Be trained under the appropriate regulations:
 - Canada: Transportation of Dangerous Goods Act and Regulations.
 - United States: Hazardous Materials Regulations (49 CFR).
 - Mexico: Regulations for the Ground Transportation of Hazardous Materials and Waste.
- Be experienced in and know the safety requirements for the specific loading and/or unloading operation being performed.
Note: do not use hammers or similar devices to unload covered hoppers, use vibrators instead.
- Know about the tank cars being used and their fittings, the type of product being loaded or unloaded, and marking, labeling and/or placarding requirements.
- Comply with all applicable regulations including:
 - Canada: Railway Association of Canada Circular No. DG- 2, Instructions for the Transfer of Dangerous Goods in Bulk on Railway Property.
 - United States: The Hazardous Materials Regulations of the Department of Transportation (49 CFR).
 - Mexico: Regulations for the Ground Transportation of Hazardous Materials and Waste of the SEGOB Diario Oficial de la Federacion.
- Be knowledgeable with information contained within Pamphlet 34: "Recommended Methods for the Safe Loading and Unloading of Non-Pressure (General Service) and Pressure Tank Cars." Pamphlet 34 can be obtained through the following link:
<https://www.aar.org/wp-content/uploads/2023/03/Pamphlet-34-3.1.23-Final.pdf>

Note: Non-Accidental releases can affect the safety of employees and surrounding communities. CPKC has instituted Tariff 8 – Hazardous Commodities that results in penalties for improper dangerous goods / hazardous material shipment.

7.2.1 Offering Dangerous Goods/Hazardous Materials for Transportation by CPKC

Our train crews must go through a basic checklist before lifting a regulated substance. Before transporting your goods on our railway, please be sure that:

- The railcar is properly placarded.
- There are no signs of railcar damage.
- There are no signs that the railcar is leaking.
- All dangerous goods / hazardous materials documentation is provided.
- The overall condition of the railcar is acceptable for transportation.

Failure to comply with these will result in refusal to move the car.

7.2.2 Documentation

All shippers, offerors, consignors, consignees or their representatives must provide the correct documentation for loaded, partially loaded or residue cars to CPKC.

7.3 Dangerous Goods / Hazardous Materials Emergencies

Report any incident, accident or leak involving dangerous goods/Hazardous Materials immediately to:

- The appropriate chemical transport emergency center:
 - Canada: call CANUTEC, 1 (613) 996-6666
 - United States: call CHEMTREC, 1 (800) 424-9300
 - Mexico: call CENACOM, 555128-0000 Extensions 36428,36422,36469,37807,37810
- The Appropriate CPKC 24/7 emergency numbers:
 - CPKC CAN 1-800-716-9132
 - CPKC U.S. North: 1-800-716-9132
 - CPKC U.S. South: 1-877-527-9464
 - CPKC Mexico: 011 (52) 81-83-05-7911

THIS SPACE LEFT INTENTIONALLY BLANK

8 Seasonal Safety Concerns

Changing seasons can impact rail operations and potentially the safety of employees and rail equipment. A well-planned seasonal operating safety plan can ensure potential exposure to hazards and service disruptions are eliminated or mitigated.

Winter Plan

Below is an overview of important items for keeping your track and walking areas safe during winter months, and especially before snow arrives:

1. Arrange resources in advance, such as snow removal and availability of sand.
2. Conduct a fall “housekeeping” inspection of your rail operation prior to the first snowfall to ensure walking areas are free of debris and tripping hazards.
3. Keep flangeways of tracks that run through private or public roads clear of snow, ice and debris at all times.
4. Clear snow buildup caused by vehicles crossing over the tracks, and snow which has slipped from adjacent roof tops onto siding tracks. Ensure to keep any snow buildup well clear of your tracks to avoid causing a restricted or close clearances.
5. Inspect the siding before service by train crews.
6. Ensure all signage used to indicate restricted/close clearances and/or track protection are displayed as required, unobstructed, and markings clearly visible (i.e. clean sign paint is fresh, etc). If using heavy machinery to clear snow build-up and drifts around your track, take special care not to run over or bury restricted clearance or derail signs.
7. Keep all walking areas and switches in the plant free of snow, ice and debris (this includes switch points and the area(s) in which employees stand to operate switches) and ensure that they are draining properly. This includes sanding or cleaning away ice caused by freezing rain to ensure the area is safe ahead of CPKC crews.
8. To ensure rail service during severe winter conditions, it is the customer’s responsibility to ensure their facility is kept clear of snow and ice with specific attention to flange ways on crossings. If your facility is not cleared in time for your next scheduled service, you must contact your local CPKC Operations office ***with as much advance notice as possible***. You must also advise CPKC of the estimated date/time when your facility will be cleared so that CPKC can restart your service on your next available scheduled service day. Failure to comply could result in service being suspended temporarily.



Spring Plan

The following Spring Plan will help reduce the potential for derailments and injuries, and help ensure our timely service:

1. Arrange resources in advance, such as grass cutting.
2. Clear away grass, weeds and debris from right-of-ways.
3. Have a track maintenance contractor inspect your trackage and facility.
4. Schedule routine repairs and maintenance.
5. Identify the need for any long term capital-type work.
6. Schedule a CPKC customer safety audit.

In cases of flooding, high water or poor drainage that may impact servicing your facility safely, you must contact your local CPKC Operations office ***with as much advance warning as possible.***

Regular, Winter and Spring safety letters will be sent to you, highlighting key requirements from the Customer Safety Handbook.

8.1.1 Movement and Securement of Equipment

Moving and securing rail equipment is one of the most important aspects of railway safety. Equipment that is not properly secured can significantly impact the safety of railway operations. The safety information in *Section 6, Railcar Handling* is useful for any employees who are responsible for movement and securement of railway equipment.

8.1.2 Walking Hazards

The number one cause of personal injuries to CPKC employees on customer tracks is slips, trips and falls. It is crucial that your trackage and facility be free of walking hazards including debris, spillage, uneven surfaces, snow and ice. Please see *Section 7, Working on or Near Tracks* for more information on walking hazards and how they are regulated.

8.1.3 Restricted Clearance Hazards

Very serious injuries to railway employees can occur at customer sidings because of restricted clearances. It is crucial that your facility is free of side and overhead clearance restrictions as much as practicable. Where there are restrictions, CPKC must be notified and the restrictions must be protected by designated warning signs.

Before making any changes to your facility that may create rail clearance restrictions, please conduct a review with local CPKC Engineering personnel. To schedule this, call your local CPKC Operations office and notify us of your proposed changes. For more details refer to *Section 3, Railway Clearances*.

8.1.4 Spillage/Wheel Contamination

Wheel contamination from consumer products like flour, canola oil and cornstarch can reduce braking capacity and cause other problems with rail equipment. These and other similar substances can cause serious incidents and equipment damage at our hump operations. Please ensure that your facility is free from spillage and wheel contamination. Refer to *Section 3.3, Spillage and Wheel Contamination* for more information.

9.1 Security Concerns, Incidents and Emergencies

CPKC is committed to providing a safe and secure workplace and to protecting its employees, its assets, the public, and the environment in compliance with applicable legislation and government regulations. Please do not put yourself in danger, if you have **any** concern related to security on CPKC property, report it to CPKC Security immediately.

CPKC Security 24 hour emergency: 1 (800) 716-9132

The following table lists security-related events with descriptions, examples and who to contact when faced with such threats on CPKC property.

Security Events and Actions		
Event	Examples	Who to Contact
<p>Security Concern Any matter that could impact CPKC security involving employees, CPKC assets or customer goods in transit. Any happenings or persons out of the ordinary.</p>	<ul style="list-style-type: none"> • Trespassers • Abandoned or suspicious vehicles • Any suspicious objects • Vandalism attempts • Stolen tools and equipment • Unusual situations 	<p>Call: CPKC Security:</p> <p>CPKC CAN: 1-800-716-9132 CPKC U.S. North: 1-800-716-9132 CPKC U.S. South: 1-800-716-9132 CPKC Mexico: 011 (52) 81-88-52-7762 KSOC Security 011 (52) 81-88-52-7287 KSOC Security</p>
<p>Security Incident A deliberate act, accidental event or perceived threat that may lead to personal injury, property damage or loss of property against CPKC assets, both human and material.</p>	<ul style="list-style-type: none"> • Theft • Vandalism • Bribery • Stalking • Assault 	
<p>Emergency An immediate or perceived danger to life, health or personal security of any individual and/or a grave threat to property or business operations.</p>	<ul style="list-style-type: none"> • Train accidents • Natural disasters • Acts of terrorism 	<p>Call:</p> <ul style="list-style-type: none"> • 911 (if available), OR • Local police, fire or emergency department <p>Also call the appropriate CPKC 24/7 emergency number:</p> <p>CPKC CAN: 1-800-716-9132 CPKC U.S. North: 1-800-716-9132 CPKC U.S. South: 1-877-527-9464 CPKC Mexico: 011 (52) 81-83-05-7911</p>

Note: Depending on the need, CPKC Public Safety Communication Center (PSCC) may notify the CPKC Operations Center (OC) to protect railway operations when there is activity on or near tracks.

9.1.1 In Case of Emergency

- Remain calm.
- Move to safety.
- Do not try to be a hero.

9.1.2 Information to Gather

When possible and safe to do so, gather as much information as possible including:

- Number of suspects and their descriptions,
- Vehicle make, model, color and license plate number if available,
- Direction of travel if the suspects left the scene,
- Description of suspicious objects:
 - Size
 - Any unusual noise
 - Odor or vapor coming from the object,
- Any victims present; names, number of victims, injuries or symptoms,
- Safest place for police or emergency responders to meet you.

9.2 Security Recommendations

9.2.1 Be Aware

Watch for and report suspicious activity such as:

- Trespassers,
- Abandoned vehicles,
- Suspicious objects,
- Vandalism attempts, and
- Unusual situations.

9.2.2 Lock and Secure

- Lock switches and derails when unattended.
- Lock or secure doors and gates to restricted areas.
- Secure all work materials and tools that can be used to interfere with safe railway operations.
- Verify all vehicles and movable equipment are secured and locked down.

9.2.3 Prevent Trespassing

In the past there have been problems with trespassers on both CPKC and customer properties. To help protect non-railway persons we recommend that customers:

- Post "No Trespassing" signs and other warning signs at any rail access points, in accordance with local regulations.
- Fence off unsafe areas (where practicable).
- Maintain the state of any current fences.

These actions will also help to prevent vandalism on CPKC and customer properties.

9.3 Shipment Security

Customers can help improve transportation and supply chain security by monitoring the loading and contents of their shipments. This includes being vigilant in guarding against stowaways and the smuggling of implements of terrorism and contraband.

9.3.1 Seal Shipments

Shippers must meet CPKC sealing requirements which include:

- Applying high security seals at doors and other access openings, to all:
 - Loaded closed box cars,
 - Intermodal units/containers, and
 - Automotive rack type cars containing any freight (including dunnage).
- Always using high security seals approved under PAS ISO 17712 test standards.
- Providing seal numbers on the bill of lading and on manifests used for Canadian and United States Customs.

Shippers are required to acquire, supply and apply seals. More information on sealing companies can be found at:

<https://www.cpkcr.com/en/customer-resources/shipping-guides-resources/Loading-Guides-and-Sealing-Requirements>

9.3.2 Shipping “Security Sensitive” Materials

When shipping high value security-sensitive materials:

- Review storage locations and procedures to ensure appropriate security for various threat or alert levels.
- Notify your Customer Service Representative and arrange to expedite the acceptance and delivery of the shipment.
 - This reduces potential exposure to surrounding people, property and the environment.

Security sensitive materials are the materials or classes of materials that pose a significant risk to national security while being transported in commerce as defined by all applicable Canadian and United States federal rules and regulations. Current U.S. definitions include:

- Class 1.1, 1.2 or 1.3 explosives,
- Class 7 (radioactive) Material,
- Poisonous inhalation hazard (PIH) or toxic inhalation hazard (TIH) commodities.

Note: PIH materials are gases or liquids that are known, or presumed on the basis of tests, to be toxic to humans. They can pose a health hazard in the event of a release during transportation. The terms PIH materials and TIH materials are synonymous. Examples include Chlorine, Anhydrous Ammonia and Sulfur Dioxide.

10 Safety Standards on CPKC Property

Railway facilities and operations can be dangerous. This is a brief summary of some of the CPKC safety standards that **apply to all personnel on CPKC property**. This however, is not a complete list. For more information on these and other CPKC safety standards contact your local CPKC Operations office.

10.1 Caution: Before Beginning Work on CPKC Property

Before beginning any work on CPKC property, you must have approval and your employees must take part in a job briefing and local safety orientation given by a CPKC employee. Please keep in mind that only qualified CPKC employees can handle main track switches, derails, electric locking mechanisms and other appliances. Personnel operating equipment of any type on CPKC tracks must be authorized and qualified. They must comply with all applicable federal rules and regulations, including but not limited to the Canadian Railway Operating Rules (CROR) or General Code of Operating Rules (GCOR) in the US.

See *Section 3.3, CPKC Main Track and Sidings* to find out what permission and protection are required for the distance you will be working from the tracks.

10.1.1 Call Before You Dig

Before doing any underground work:

1. Call the appropriate "Call Before You Dig" number for your province or state to get the proper permission and permits. If required to dig on CPKC property, you must **notify CPKC with 7 days advanced notice** to obtain the required permission and to get cable locates completed.
2. Arrange for a qualified person to mark the location of piping, cables and/or fiber-optics.

Note: Underground cables and fiber-optics shift considerably under the surface with weather and ground geology. Depending on ground structure, cables can lie on either side of the track.

10.2 Required Protection Programs

10.2.1 Fall Protection

A fall protection program must be used when any work is done on CPKC property above the following heights. Your fall protection system must comply with these regulations or the provincial or state equivalents.

Fall Protection Regulation Requirements			
	Canada	United States	Mexico
Regulation	Part II of the Canada Labour Code	OSHA	
Height	10 feet (3.3 m)	6 feet (1.83 m)	6 feet (1.83 m)
		Federal Railroad Administration (FRA)	
		12 feet (3.66 m) on Railway Bridges	

Note: A fall protection system must be used if your operations require employees to work above these heights. The top of most rail cars are above these heights.

10.2.2 Confined Spaces

A confined space is one that:

- is not intended for human occupancy except for performing assigned work;
- has limited or restricted means for entry or exit; and
- is not designed for continuous employee occupancy and may become hazardous to a person entering it for reasons including:
 - its design, construction, location or atmosphere;
 - the materials in it or;
 - any other conditions relating to it.

A confined space program and entry procedures are required to enter certain rail cars including covered hoppers and tank cars. Refer to your local regulatory requirements for more details. If conducting such work on CPKC property, you must comply with all applicable federal regulations.

10.3 Personal Protective Equipment

Personal protective equipment (PPE) protects against foreign objects entering the eyes and impacts to the head. It increases visibility of workers and protects against moving equipment. To reduce the risk of injury, all people on CPKC property must comply with the following requirements for PPE. Regular visitors to CPKC property are expected to supply their own.

Personal Protective Equipment Requirements		
Type of Protection	Where Needed	Requirements
Hard Hats	Required on CPKC property. Not required in an enclosed vehicle or office unless maintenance work is being performed. CPKC switching crews are not required to wear hard hats.	Must be in proper condition and free from unnecessary marks. High visibility recommended.
Safety Glasses	Required everywhere except offices.	Permanently attached side shields required.
Safety Boots	Required everywhere except offices.	Keep laced to top and tied securely for ankle support.
High Visibility Apparel	Required on CPKC property. Optional within a vehicle or building.	Needs both fluorescent color and retro-reflective properties. Colors are orange or green.
Work Clothing	Required everywhere except offices. In offices: Business casual attire.	Wear ankle-length pants and waist-length shirts with minimum quarter-length sleeves at all times.
Seat Belts	Required everywhere.	Use required in all equipped vehicles except when performing inspections and traveling under 15 mph (24 km/hr).
Hearing Protection	Required in all designated locations and where the noise level is greater than 84 decibels.	In compliance with applicable regulations for the job task.

Respiratory Protection	All designated areas.	In compliance with applicable regulations for the job task.
Fall Protection	At any height above those set by federal regulations or provincial or state equivalents.	In accordance with these regulations.

Note: All personal protective equipment must meet the requirements of the Canadian Standards Association (CSA) or the American National Standards Institute (ANSI), as applicable.

10.4 Flagging Protection: Working with a Rail Flag Person

10.4.1 Arranging for Flagging Protection

When planning to work on or near tracks, notify your local CPKC Operations office at least one week in advance so that CPKC management can assess the need for flagging protection. If flagging protection is necessary, CPKC will provide a qualified Flag Person. There is a cost associated with this.

10.4.2 Working under Flagging Protection

Good communication between customers and CPKC's Flag Person is imperative. The CPKC Flag Person is responsible for clearing any movement of workers and equipment near the tracks, no matter how minor.

Customers must:

- Include the CPKC Flag Person in the job briefing prior to starting work.
- Never assume a move is cleared unless you receive direct instructions from the CPKC Flag Person.
- Never interfere with a CPKC Flag Person who is communicating by radio. Wait until they are finished and able to give you their full attention.
- Not assume a move is cleared by something overheard on the radio.

11 CPKC Customer Safety Inspection Process

Locally, CPKC will work with customers to review compliance to safety standards. This will happen on a set basis as determined by resources and specific needs.

These inspections cover five key areas:

- Track conditions,
- Movement and securement of railway equipment,
- Walking hazards,
- Restricted clearance hazards, and
- Spillage/wheel contamination.

Inspection results are rated as:

- "Green status" indicating full compliance,
- "Yellow status" indicating partial compliance,
- "Red status" indicating non-compliance.

In past years, we have had strong cooperation and success with this process. Local Area Managers and Workplace Health and Safety Committee members start the inspection and perform it together with the customer (when and wherever possible). All inspection results are forwarded to the customer.

If the inspection results in a "yellow status" or "red status," a meeting will be requested as soon as possible to create an action plan for improvement. "Red status" require your local CPKC Operations Office to notify the CPKC Customer Account Manager to take further action, such as holding the track out of service. Failure to correct safety flaws can result in refusal to provide rail service to that customer.

This inspection process will provide us together, an opportunity to correct any hazards before they cause harm. If you, the customer, want to initiate the inspection process, please contact your local CPKC Operations Office.

Recommended for you to keep a record of these customer inspections.

Customer/Workplace Safety Inspection (Track)

Date of current inspection (YY-MM-DD):	
Inspected by:	
Date of last inspection:	
Location:	
Customer name:	
Customer contact information:	

Customer has been provided a copy of this report? Yes No (circle one)

HAZARD RISK RATING

RED Status -Indicates Non-compliance with CPKC practice/standards.
Risk Level A exists (as described in table below)

- CPKC Operations office will be notified, and service may be suspended immediately.
- CPKC Customer Service Representative will be contacting your general office.
- CPKC Manager will be contacting your facility to follow up on required actions.

YELLOW Status -Indicates partial compliance with CPKC practice/standards.
Risk Level B or C exists (as described in table below)

- CPKC Manager will contact you to follow-up on required actions.

GREEN Status -Indicates compliance with CPKC practice/standards. No further action required.

Risk Level A	Major	A condition or practice likely to cause permanent disability, loss of life or body part and/or extensive loss of structure, equipment, or material.
Risk Level B	Serious	A condition or practice likely to cause serious injury or illness resulting in temporary disability or property damage that is disruptive but not extensive.
Risk Level C	Minor	A condition or practice likely to cause non-disabling injury or illness or non-disruptive property damage.

Item (YY-MM-DD)	Brief Description	Risk Level	Who	Action to be taken	Due Date (YY-MM-DD)	Completion Date (YY-MM-DD)

Issued May 2023

Customer/Workplace Safety Inspection (Track)

CUSTOMER NAME:					
INSTRUCTIONS 1) Check whichever applies: Y or N. 2) Any unacceptable conditions are to be recorded as action items on page 1 and completion date noted.					
	Y	N	Y	N	Y
EQUIPMENT SECUREMENT					
Required # of handbrakes applied to equipment?					
Equipment secured at appropriate end of track?					
Chisel applied?					
Point signs are visible?					
Approved equipment handling process in place?					
SWITCHES					
Switches operable?					
Keeper available?					
Clear of debris, snow, or ice?					
DETAILED					
Details operable?					
Clear of debris, snow or ice?					
WALKWAYS					
Clear of debris, snow, or ice?					
Subboard dispensed?					
Lights operable?					
Walkways and handrails in good repair (including bridges)?					
ROAD CROSSINGS					
Clear of snow or ice?					
Flangeways clear of debris, snow, or ice?					
Subboard dispensed?					
CLEARANCES					
Equipment not left foul?					
Signs displayed and visible?					
Temporary clearance issues?					
Structures meet clearance standards?					
Recorded clearance signs are visible?					
TRACK CONDITIONS					
Clear of debris, snow, or ice?					
Adequate drainage?					
Wheels under control?					
Obstacle on track?					
TIE & RAIL CONDITION					
Tie and gauge condition good?					
Cross level & alignment is good?					
Rail condition good?					
TRACK PROTECTION					
Approved procedure used?					
Evaluation plan is accessible?					
Shoring or equipment in good condition (rotting, muddy, or greasy)?					
Blue flag or equivalent is visible from occupied track?					
Does customer inspect track monthly, as required?					

Issued: May 2023

12 Railway Safety Resources and Materials

Safety Information	Contacts
Customer Service Coordinator <ul style="list-style-type: none"> As referenced in this handbook 	Customer Service Coordinator (24/7) Tel.: 1 (888) 333-8111
CPKC Police Service <ul style="list-style-type: none"> Presentations and information on railway safety and security Assistance with security assessments of siding tracks spur locations, and car loading and unloading areas Assistance in identifying physical and procedural security threats Crime Prevention Through Environmental Design (CPTED) strategies for siding tracks/spur track locations 24/7 Reporting and investigation of railway security incidents and concerns 	CPKC Police Service (24/7) Tel.: 1 (800) 716-9132 Email: policecommunication@cpr.ca 24 hour emergency lines CPKC U.S. South: 1-877-527-9464 CPKC Mexico: 011 (52) 81-83-05-7911 Critical Incident Desk 011 (52) 81-88-52-7762 KSOC Security 011 (52) 81-88-52-7287 KSOC Security
Railway Association of Canada (RAC) <ul style="list-style-type: none"> Emergency response advice and expertise Information sessions Customized training in safe loading/unloading, in-plant switching and proper preparation of shipping papers Link to government for rail-related matters 	The Railway Association of Canada 99 Bank Street, Suite 1401 Ottawa, ON, K1P 6B9 Tel.: 1 (613) 567-8591 Fax: 1 (613) 567-6726 Email: rac@railcan.ca www.railcan.ca
Association of American Railroads (AAR) <ul style="list-style-type: none"> Research into rail efficiency and safety Access to Railinc, leading provider of rail information technology to North American railroads Link to congress for rail-related matters 	Association of American Railroads 50 F Street NW Washington, DC, 20001-1564 Tel.: 1 (202) 639-2100 www.aar.org
Association of American Railroads (AAR) Bureau of Explosives (BOE) <ul style="list-style-type: none"> Emergency response and hazmat awareness training Hazmat regulation inspections Certification and re-certification inspections of tank car repair facilities Hazmat transportation information Quality Assurance Audits 	AAR Bureau of Explosives Transportation Technology Center Inc. 55500 Dot Road Pueblo, CO, 81001 Tel.: 1 (719) 584-0749 Cell: 1 (719) 250-8768 Fax: 1 (719) 585-1895 Email: BOE@aar.com

<p>Transport Canada – Rail Safety</p> <ul style="list-style-type: none"> • Policies, regulations, acts • Environmental affairs • Services for transportation 	<p>Transport Canada – Rail Safety Branch Tower C, Place de Ville 300 Sparks Street Ottawa, ON, K1A 0N5</p> <p>Tel.: 1-866-995-9737</p> <p>www.tc.gc.ca</p>
<p>Federal Railroad Administration (FRA)</p> <ul style="list-style-type: none"> • Rail safety regulations • Railroad assistance programs • Research into railroad safety 	<p>Federal Railroad Administration 1200 New Jersey Avenue SE Washington, DC, 20590</p> <p>www.fra.dot.gov</p>
<p>Occupational Health and Safety Administration (OSHA)</p> <ul style="list-style-type: none"> • U.S. labor information and programs • Confined spaces and other regulations 	<p>U.S. Department of Labor Occupational Safety and Health Administration 200 Constitution Avenue NW Washington, DC, 20210</p> <p>www.osha.gov</p>
<p>Railway Industrial Clearance Association of North America (RICA)</p> <ul style="list-style-type: none"> • Clearance contacts • Clearance FAQs 	<p>Railway Industrial Clearance Association Secretary 11811 North Freeway, Suite 205 Houston, TX, 77060</p> <p>Tel.: 1 (281) 847-3213 x 202 Email: secretary@rica.org</p> <p>www.rica.org</p>

13 EMERGENCY TELEPHONE NUMBERS

CPKC Police

- All security and safety issues
- Suspicious activity on railway property
 - Trespassers
 - Vandalism attempts
 - Abandoned vehicles
 - Stolen tools and equipment
 - Suspicious objects, persons, and/or situations

CPKC 24/7 emergency numbers:

CPKC CAN: 1-800-716-9132
 CPKC U.S. North: 1-800-716-9132
 CPKC U.S. South: 1-877-527-9464
 CPKC Mexico: 011 (52) 81-83-05-7911

CPKC OPERATIONS CENTER (OC)


- Derailment of any railcar
- Leak or suspected leak of any tank car or other dangerous commodity on CPKC property
- Any release of a material from a rail car (i.e. non-dangerous goods) on CPKC property
- Equipment or materials within the Main Track or Siding clearance limits:
 - 8 feet from nearest rail laterally
 - 22 feet from top of rail vertically
- Damage to any switch, derail, sign, rail or track structure
- Any other condition or situation which may cause injury, damage or derailment

CPKC Police Service

(24/7) Tel.: 1 (800) 716-9132
 Email: policecommunication@cpr.ca

24 hour emergency lines:

CPKC U.S. South: 1-877-527-9464
 CPKC Mexico: 011 (52) 81-83-05-7911
 Critical Incident Desk
 011 (52) 81-88-52-7762
 KSOC Security
 011 (52) 81-88-52-7287
 KSOC Security

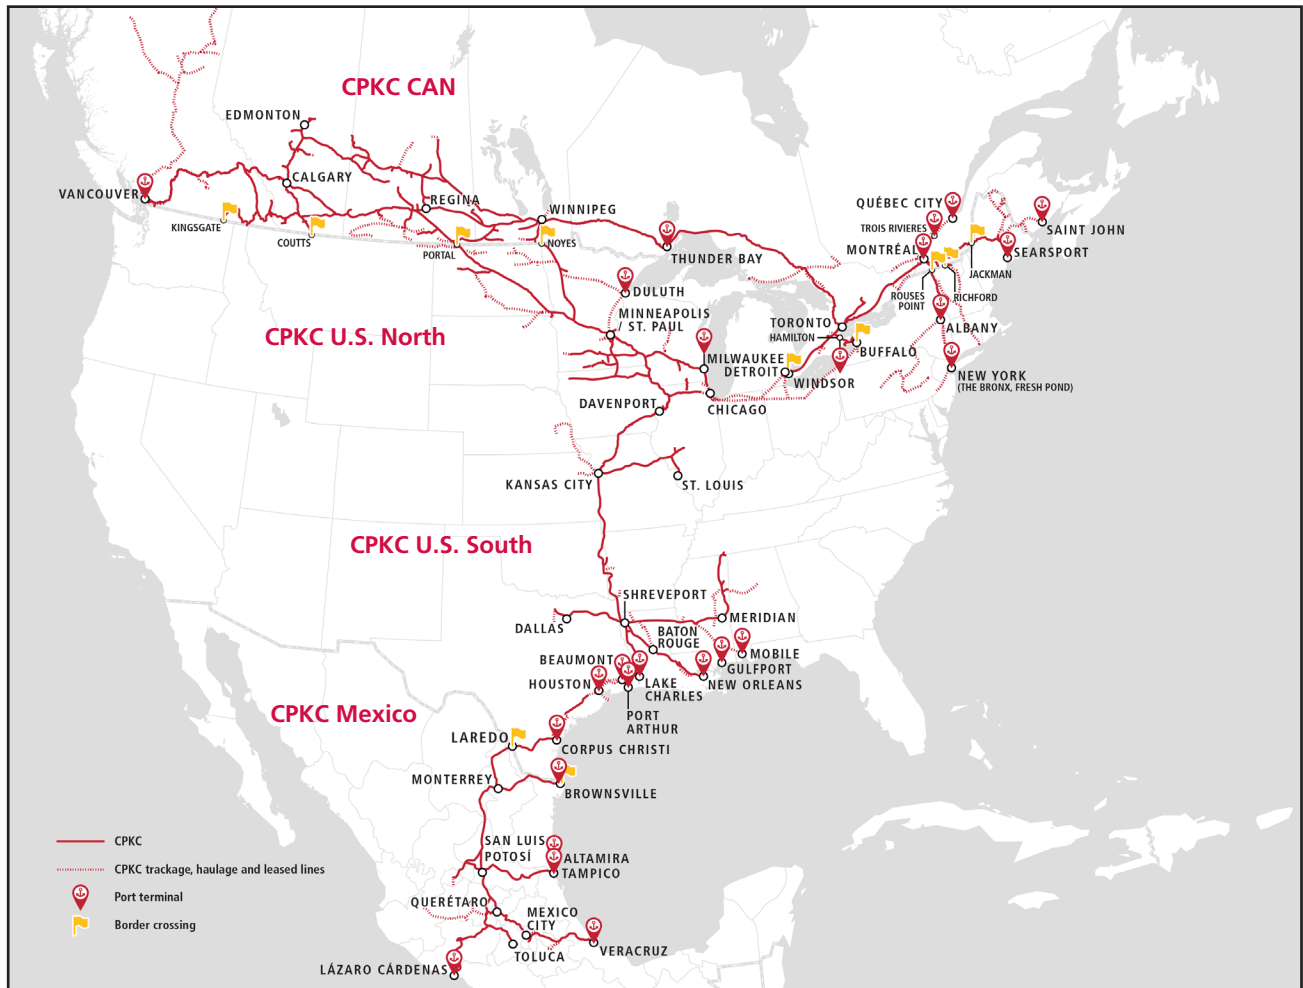

Emergencies are critical situations that may affect personnel, public safety or the environment. If you encounter any of these situations contact the numbers listed above and CPKC immediately.

CPKC Head Office

7550 Ogden Dale Road, S.E., Tel.: 1 (403) 319-7000 Fax: 1 (403) 319-7567 www.cpkcr.com

14 Important Telephone Numbers

Emergencies are critical situations that may affect personnel, public safety or the environment. If you encounter any of these situations contact the numbers listed below and CPKC immediately.

Critical Safety Information	Contacts
CANUTEC (Canadian Transport Emergency Center) <ul style="list-style-type: none"> • Chemical Transport Emergencies (Canada only) 	Emergency: 1 (613) 996-6666 (call collect) Cell: *666 (Canada only) Information: 1 (613) 992-4624 (call collect) www.tc.gc.ca/canutec
CHEMTREC® (Chemical Transportation Emergency Center) <ul style="list-style-type: none"> • Chemical Transport Emergencies (United States only) 	Emergency: 1 (800) 424-9300 Information: 1 (800) 262-8200 www.chemtrec.com/Chemtrec
Damage Prevention and Claim Services (DPCS) <ul style="list-style-type: none"> • Submitting a freight claim • Making salvage decisions • Arranging inspections • Provide advice and direction on load securement when shipping by rail in closed cars or intermodal units • Informing on innovative new products that will help protect your product • Preventing damage reoccurrence 	DPCS: Canada and US: Tel: 1 (877) 277-3732 (toll free) Fax: 1 (877) 685-3555 (toll free) Email: contact_dpfc@cpr.ca Loading Plan Advisors: Email: dpcs_sop@cpr.ca

CPKC believes it is important to perform job briefings before starting any activity and as the job or conditions change. Job briefings identify safety hazards and emergency procedures related to the work being done, whether it is in the yard or the office. Following, is a sample job briefing card. We hope you will consider including the following topics in your job briefings.

Sample Job Briefing Card	
<p>1.1 General Information</p> <p>Hold a job briefing before performing any job involving two or more employees, fouling tracks or wearing personal protective equipment. This is to ensure that all employees understand:</p> <ul style="list-style-type: none"> • The task being performed, • The hazards and related control measures for that task, • The protection required to carry out the work, and • Each employee's individual responsibility. <p>Hold additional job briefings as the work progresses or the situation changes.</p> <p>1.2 Planning the Job Briefing</p> <p>Safe and productive work results from a well constructed and communicated job plan. To develop a job plan:</p> <ul style="list-style-type: none"> • Review the work or tasks to be done. • Determine the steps to be taken. • Plan the action for each step. • Consider how the work will be assigned. • Determine the tools, equipment and materials required. <ul style="list-style-type: none"> - Determine if any forms, permits and/or protection are required. • Check the job location and work area. <p>Consider the existing and potential hazards that may be involved as a result of:</p> <ul style="list-style-type: none"> • The type of work being done, • The time of day the work will be done, • The job location, • The safety or personal protective equipment required, • The tools, equipment and materials being used, • Any buried/overhead power cables along the right of way, and • Independent conditions (i.e. traffic, weather). 	<p>1.3 Conducting the Job Briefing</p> <p>When conducting the job briefing:</p> <ul style="list-style-type: none"> • Explain the work or tasks to all employees: <ul style="list-style-type: none"> - What will be done? - How will it be done? - When will it be done? - Where will it be done? - Who will do it? - Why will it be done? • Explain the safety precautions and track protections necessary. • Explain existing and potential hazards, and their corresponding controls. • Explain what coordination with others is needed (i.e. authorities, utilities and other work crews). • Ask for clarification to make sure employees understand their work assignments. • Ensure employees know how to use any special tools, material, equipment or procedures, safely. <p>1.3.1 Before Starting Work</p> <p>Before beginning the job:</p> <ul style="list-style-type: none"> • Identify underground cables/fiber/piping and make proper notification before digging. • Verify all safety systems on tools and work equipment are working correctly. • Check to make sure any potential hazards have been identified and action has been taken to correct them. • Lead employees through a warm up to stretch their muscles and prepare for injury-free work. <p>1.3.2 Follow Up</p> <p>Check regularly to ensure that employees are:</p> <ul style="list-style-type: none"> • Following all plans and using correct work procedures, • Carrying out their assigned tasks. <p>1.3.3 Individual Responsibility</p> <p>All employees are responsible for:</p> <ul style="list-style-type: none"> • Ensuring that they fully understand the work to be done, • Ensuring tools and equipment are inspected and determined safe before the job starts, • Using safe practices during their shift and contributing to the safety of their co-workers, • Carrying out the work according to the job briefing or modifying it appropriately if conditions change, and • Stopping to clarify procedures when met with a safety issue related to their work.

THIS SPACE LEFT INTENTIONALLY BLANK

24-Hour Emergency Contacts

CPKC CAN: 1-800-716-9132

CPKC U.S. North: 1-800-716-9132

CPKC U.S. South: 1-877-527-9464

CPKC Mexico: 011 (52) 81-83-05-7911

Issued: October 2023

www.cpkcr.com

